

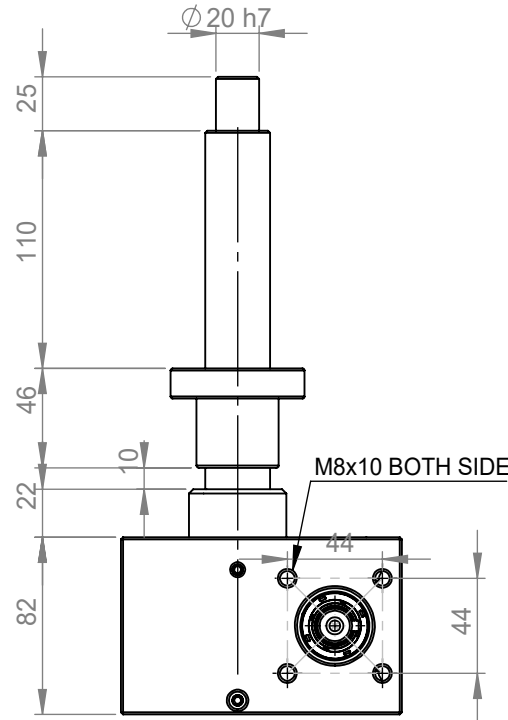
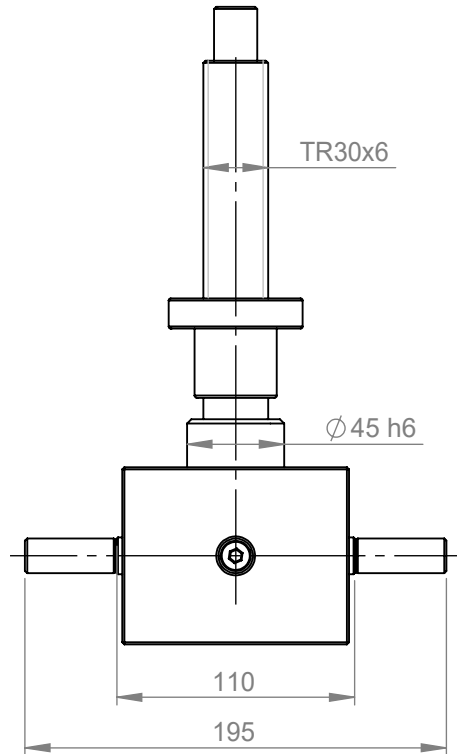
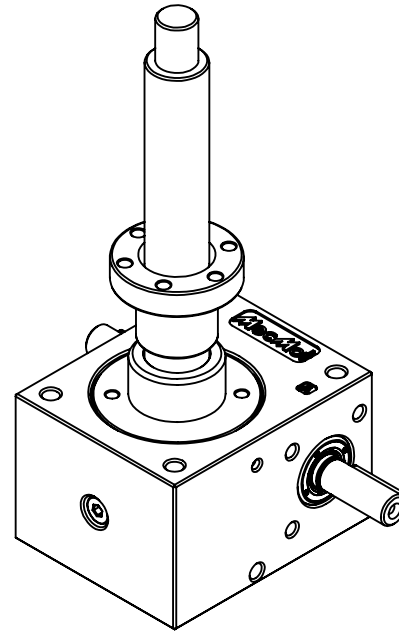


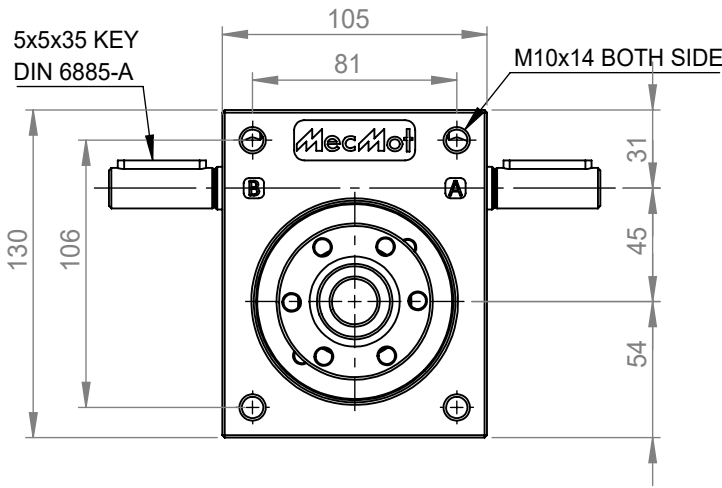

ACCESSORIES

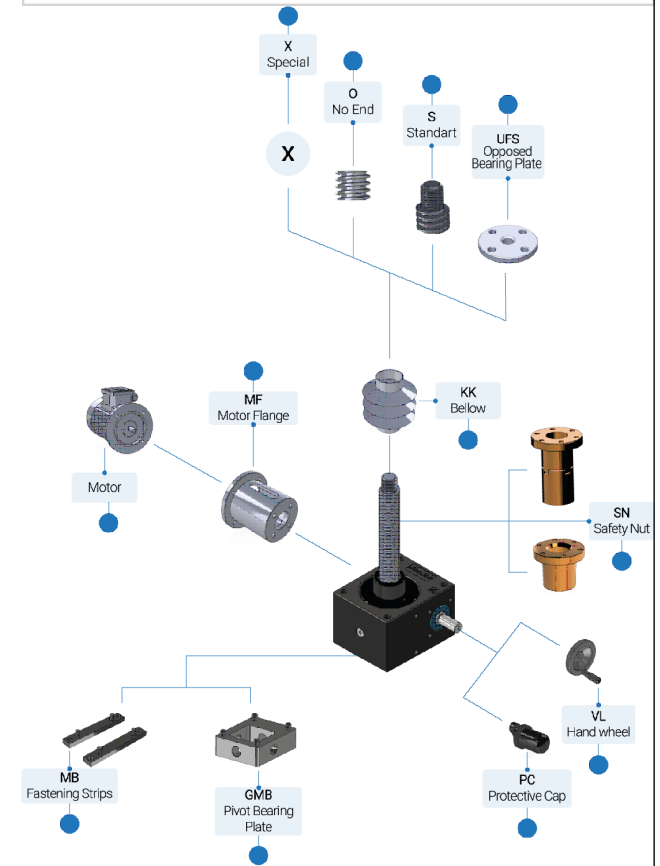

The page numbers for the detailed descriptions of the accessories are given.

DESCRIPTION	AÇIKLAMA
Type : Rotating Screw (SH)	Tip : Somun Hareketli (SH)
Max force : 10 kN (for housing)	Maks. Kuvvet : 25 kN (gövde dayanımı)
Ratio : 4:1 (A) or 16:1 (B)	Gövde Malzemesi : GGG-40
Housing Material : GGG 40	Dişli Oranı : 6:1 (A) veya 24:1 (B)
Screw Size : Tr 20x4	Trapez Mil : Tr 30x6
Screw Material : C45 Steel	Trapez Mil Malzemesi : C45 Çelik
Stroke : 100 mm	Strok : 100 mm
Input Shaft Side : Input Side (AB)	Giriş Mil Yönü : Çift Çıkış (AB)
Safety Nut : NO	Emniyet Somunu : HAYIR
Working Temperature : -10 / +60 C	Çalışma Sıcaklığı : -10 / +60 C
Nominal Input Speed : 1500 rpm	Nominal Giriş Devri : 1500 rpm
Max Input Speed : 3000 rpm	Maks. Giriş Devri : 3000 rpm
Max Input Torque (for 1500 rpm) : 13 Nm	Maks. Giriş Torku (1500 rpm için) : 18 Nm
Max Drive-Through Torque : 55 Nm	Maks. İletilecek Tork : 100 Nm
Housing Lubrication : EP2 Grease	Dişli Kutusu Yağlama : EP2 Gres
Screw Lubrication : Sentinel SR OG Grease	Trapez Mil Yağlama : Sentinel SR OG Gres

VKT25-SH-A/B-TRS-0100-S-AB