

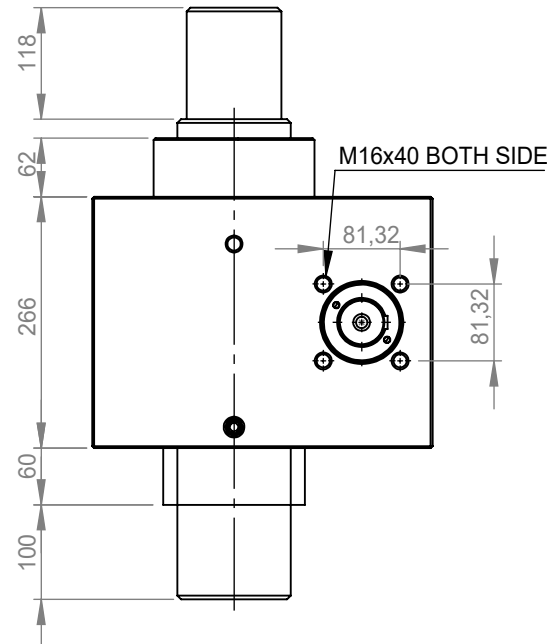
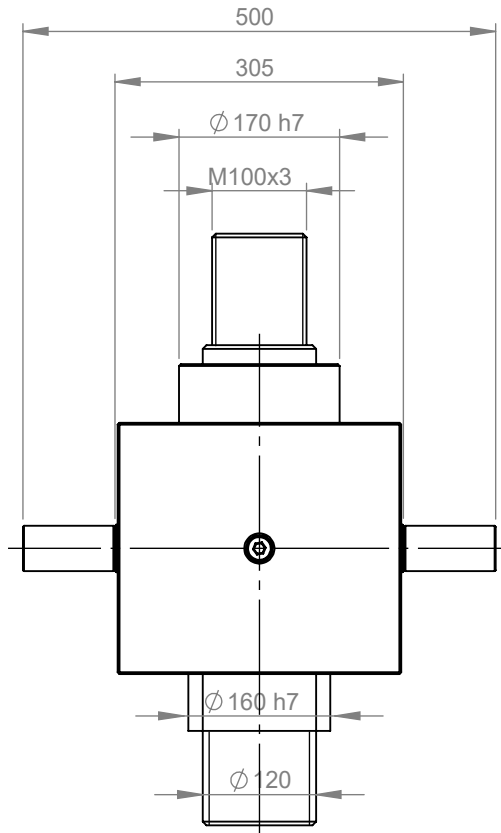
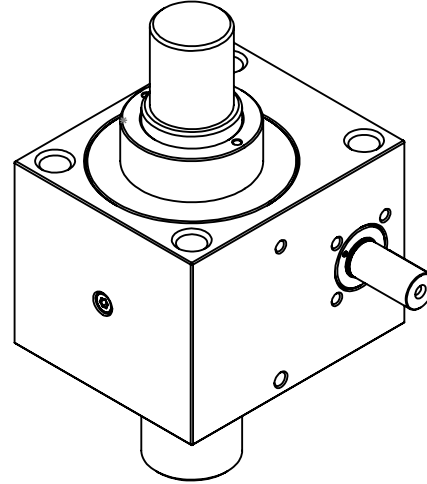


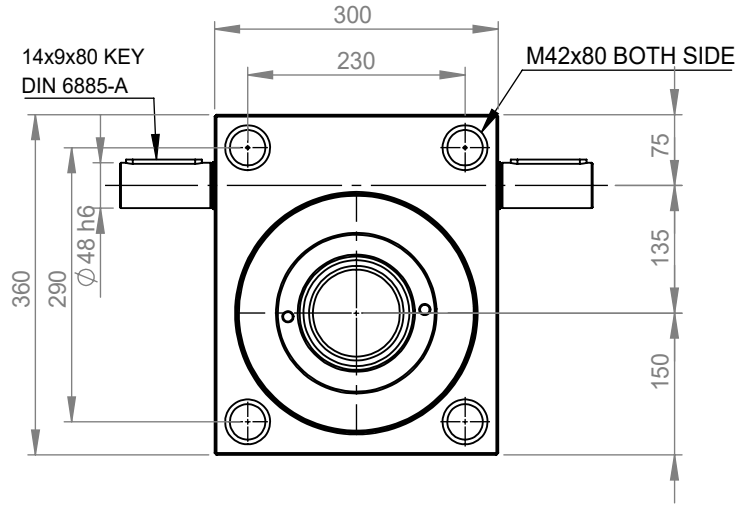

## ACCESSORIES

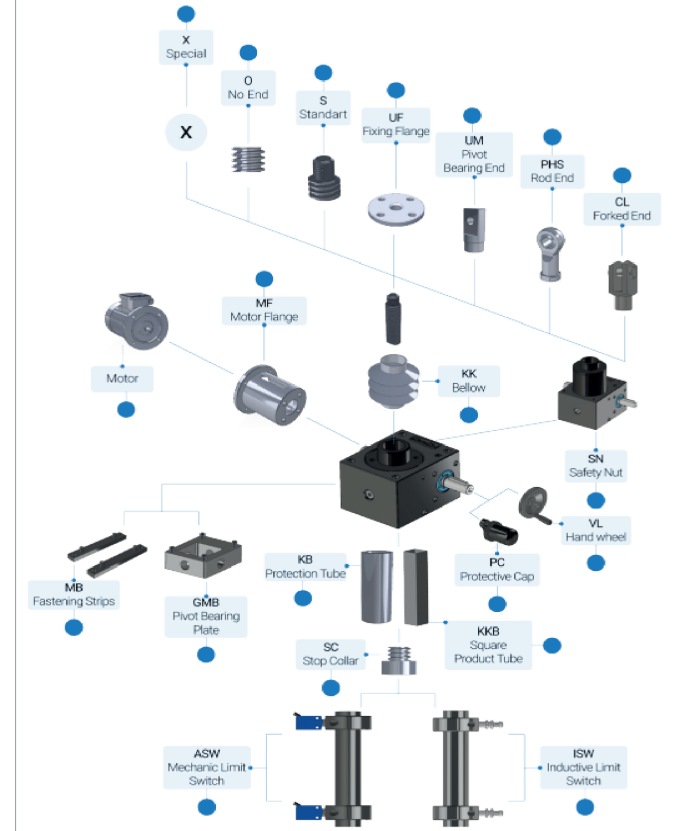

| DESCRIPTION                                | AÇIKLAMA                                     |
|--------------------------------------------|----------------------------------------------|
| Type : Translating Screw ( VH-S )          | Tip : Mil Hareketli ( VH-S )                 |
| Max force : 500 kN ( for housing )         | Maks. Kuvvet : 500kN ( gövde dayanımı )      |
| Ratio : 14:1 ( A ) or 56:1 ( B )           | Gövde Malzemesi : GGG-40                     |
| Housing Material : GGG-40                  | Dişli Oranı : 14:1 ( A ) veya 56:1 ( B )     |
| Screw Size : Tr 120x14                     | Trapez Mil : Tr120x14                        |
| Screw Material : C45 Steel                 | Trapez Mil Malzemesi : C45 Çelik             |
| Stroke : 100 mm                            | Strok : 100 mm                               |
| Input Shaft Side : Input Side ( AB )       | Giriş Mil Yönü : Çift Çıkış ( AB )           |
| Safety Nut : NO                            | Emniyet Somunu : HAYIR                       |
| Working Temperature : -10 / +60 C          | Çalışma Sıcaklığı : -10 / +60 C              |
| Nominal Input Speed : 1500 rpm             | Nominal Giriş Devri : 1500 rpm               |
| Max Input Speed : 1800 rpm                 | Maks. Giriş Devri : 1800 rpm                 |
| Max Input Torque ( for 1500 rpm ) : 100 Nm | Maks. Giriş Torku ( 1500 rpm için ) : 100 Nm |
| Max Drive-Through Torque : 1600 Nm         | Maks. İletilecek Tork : 1600 Nm              |
| Housing Lubrication : EP2 Grease           | Dişli Kutusu Yağlama : EP2 Gres              |
| Screw Lubrication : Sentinel SR OG Grease  | Trapez Mil Yağlama : Sentinel SR OG Gres     |

VKT500-VH-S-A/B-TRS-0100-S-AB