

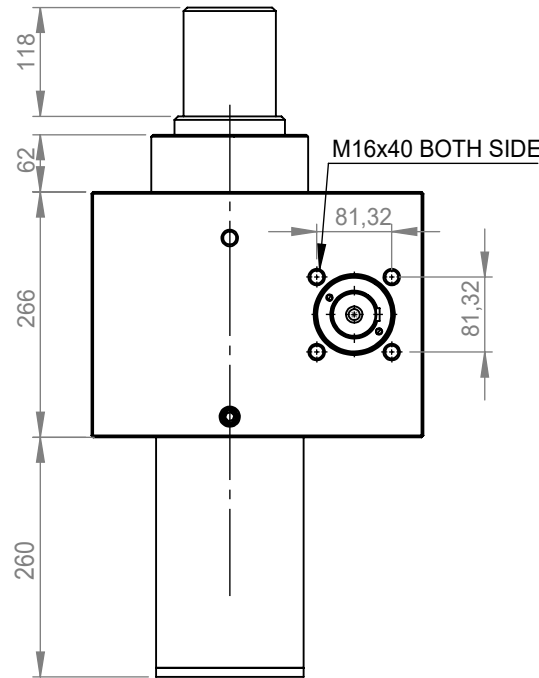
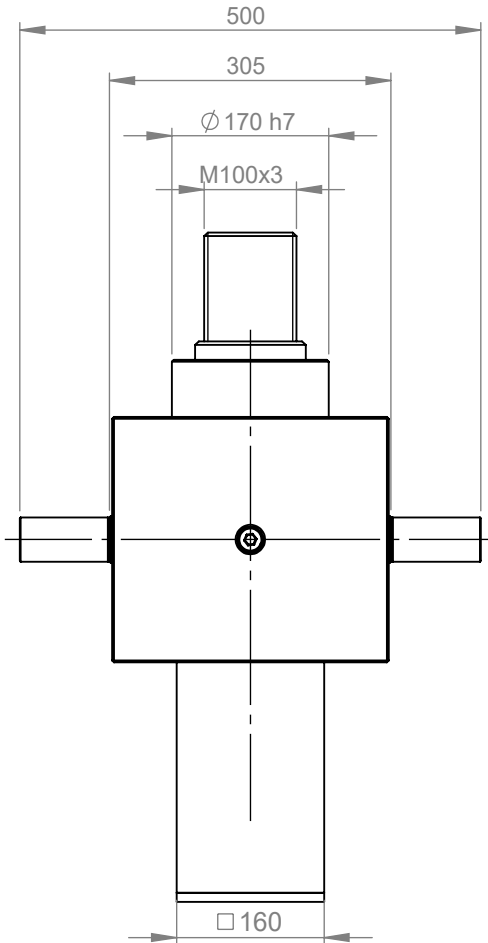
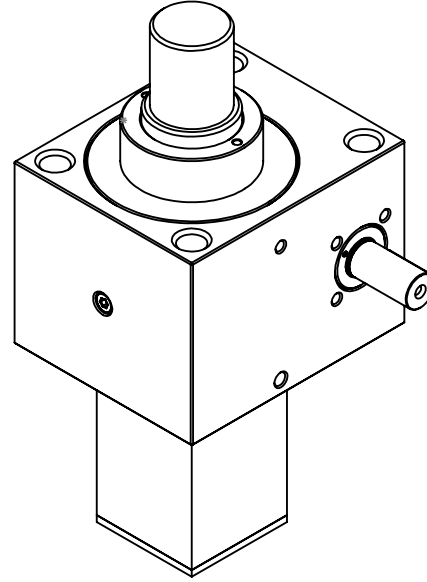


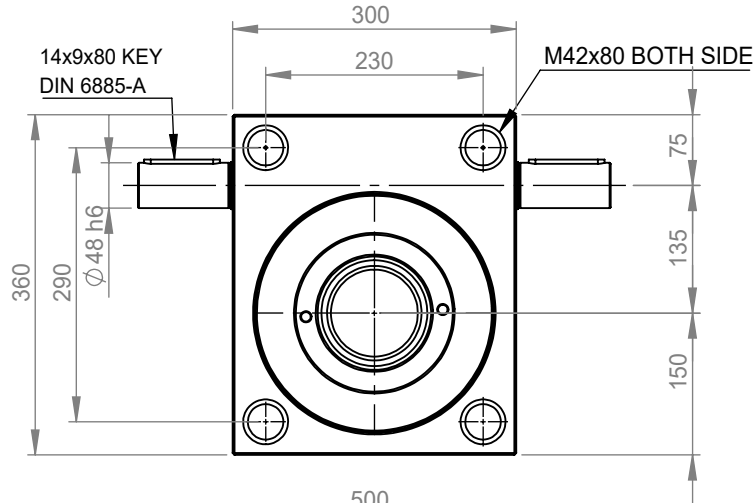

## ACCESSORIES

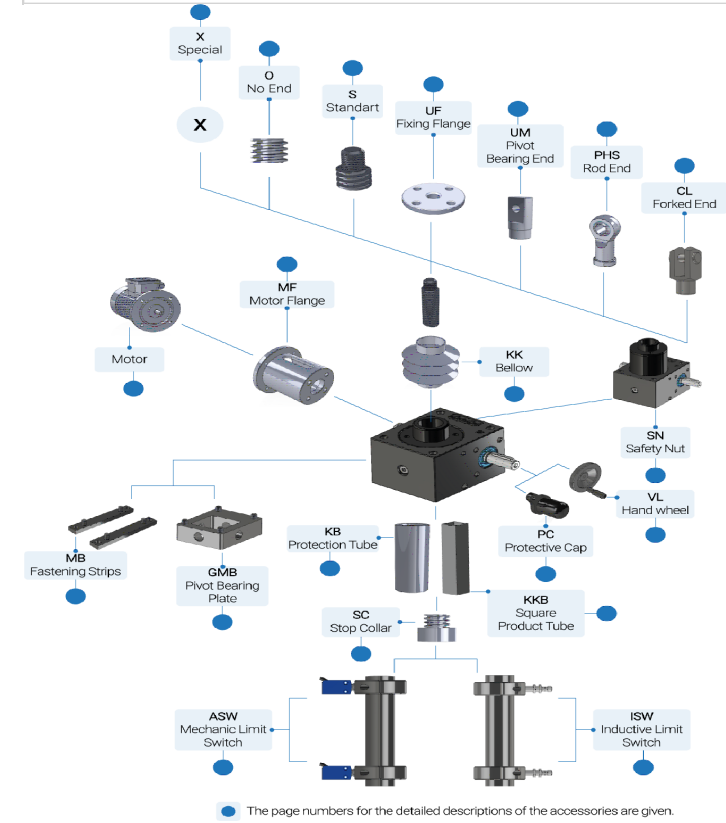

| DESCRIPTION                                | AÇIKLAMA                                   |
|--------------------------------------------|--------------------------------------------|
| Type : Translating Screw Unturning (VH-SI) | Tip : Dönüş Engelli Mil Hareketli (VH-SI)  |
| Max force : 500 kN (for housing)           | Maks. Kuvvet : 500kN ( gövde dayanımı )    |
| Ratio : 14:1 ( A ) or 56:1 ( B )           | Gövde Malzemesi : GGG-40                   |
| Housing Material : GGG-40                  | Dişli Oranı : 14:1 ( A ) veya 56:1 ( B )   |
| Screw Size : Tr 120x14                     | Trapez Mil : Tr120x14                      |
| Screw Material : C45 Steel                 | Trapez Mil Malzemesi : C45 Çelik           |
| Stroke : 100 mm                            | Strok : 100 mm                             |
| Input Shaft Side : Input Side ( AB )       | Giriş Mil Yönü : Çift Çıkış ( AB )         |
| Safety Nut : NO                            | Emniyet Somunu : HAYIR                     |
| Working Temperature : -10 / +60 C          | Çalışma Sıcaklığı : -10 / +60 C            |
| Nominal Input Speed : 1500 rpm             | Nominal Giriş Devri : 1500 rpm             |
| Max Input Speed : 1800 rpm                 | Maks. Giriş Devri : 1800 rpm               |
| Max Input Torque (for 1500 rpm) : 100 Nm   | Maks. Giriş Torku (1500 rpm için) : 100 Nm |
| Max Drive-Through Torque : 1600 Nm         | Maks. İletilecek Tork : 1600 Nm            |
| Housing Lubrication : EP2 Grease           | Dişli Kutusu Yağlama : EP2 Gres            |
| Screw Lubrication : Sentinel SR OG Grease  | Trapez Mil Yağlama : Sentinel SR OG Gres   |

**VKT500-VH-SI-A/B-TRS-0100-S-AB**