

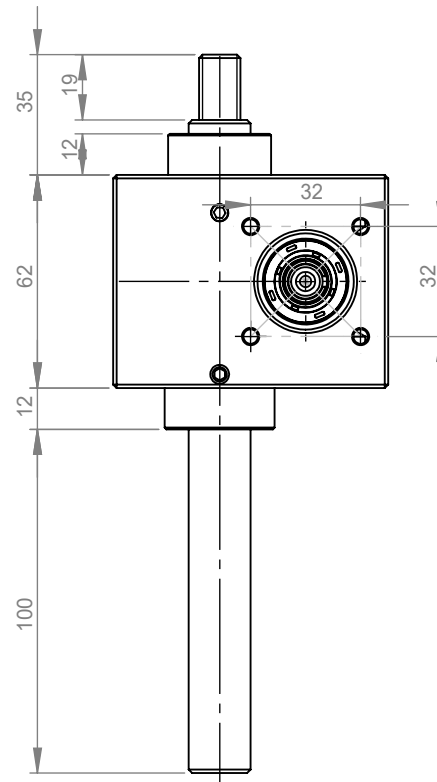
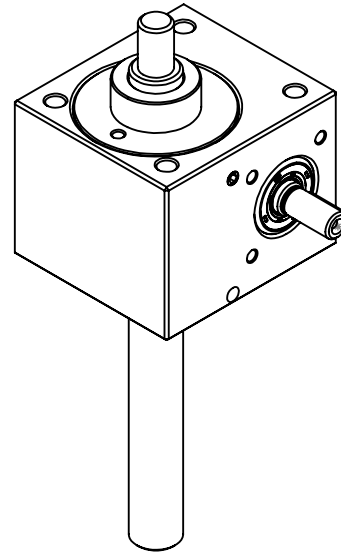
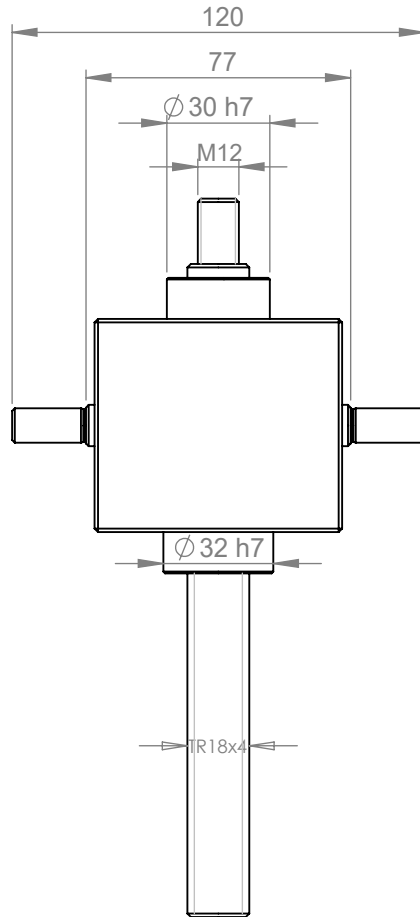


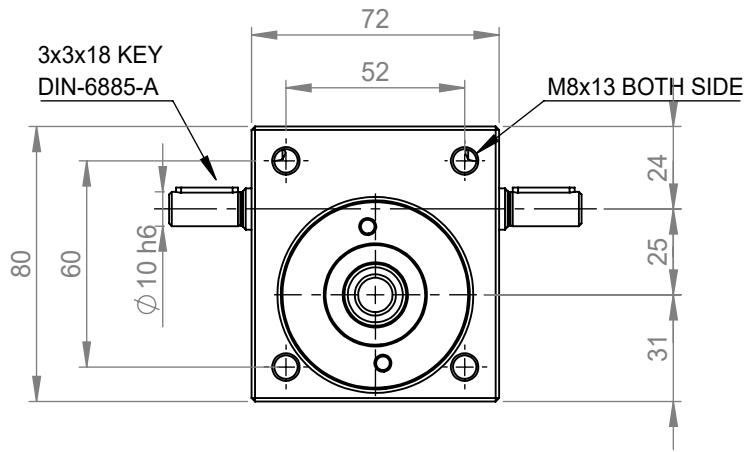

ACCESSORIES

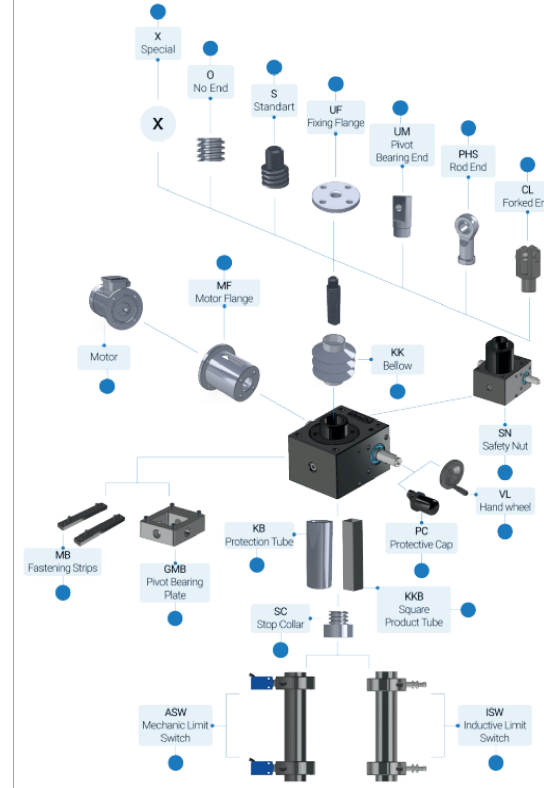

DESCRIPTION	AÇIKLAMA
Type : Translating Screw (VH-S)	Tip : Mil Hareketli (VH-S)
Max force : 5 kN (for housing)	Maks. Kuvvet : 5 kN (gövde dayanımı)
Ratio : 4:1 (A) or 16:1 (B)	Gövde Malzemesi : Alüminyum
Housing Material : Aluminium	Dişli Oranı : 4:1 (A) veya 16:1 (B)
Screw Size : Tr 18x4	Trapez Mil : Tr 18x4
Screw Material : C45 Steel	Trapez Mil Malzemesi : C45 Çelik
STROKE:100mm	Strok : 100mm
Input Shaft Side : Both Side (AB)	Giriş Mil Yönü : Çift taraflı (AB)
Safety Nut : NO	Emniyet Somunu : HAYIR
Working Temperature : -10 / +60 C	Çalışma Sıcaklığı : -10 / +60 C
Nominal Input Speed : 1500 rpm	Nominal Giriş Devri : 1500 rpm
Max Input Speed : 3000 rpm	Maks. Giriş Devri : 3000 rpm
Max Input Torque (for 1500 rpm) : 4.5 Nm	Maks. Giriş Torku (1500 rpm için) : 4.5 Nm
Max Drive-Through Torque : 40 Nm	Maks. İletilecek Tork : 40 Nm
Housing Lubrication : EP2 Grease	Dişli Kutusu Yağlama : EP2 Gres
Screw Lubrication : Sentinel SR OG Grease	Trapez Mil Yağlama : Sentinel SR OG Gres

VKT5-VH-S-A/B-TRS-0100-S-AB